


Now with Heavy Duty Hook Latch

- Features: -**
- Load limited is available at extra cost.
 - Low effort to lift maximum load.
 - Automatic double pawl braking system.
 - Premium grade alloy load chain and zinc plated hand chain as standard.
 - Drop-forged and expertly heat treated hooks for great strength and long wearing.
 - Capacity ranges from 0.5ton to 20ton.

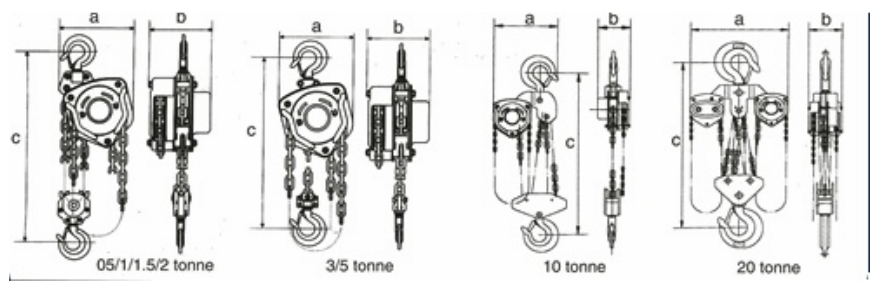

Model		HSZ-0.5A	HSZ-1A	HSZ-1.5A	HSZ-2A	HSZ-3A	HSZ-5A	HSZ-10A	HSZ-15A	HSZ-20A
Capacity	tons	0.5	1	1.5	2	3	5	10	15	20
Standard lift	m	2.5	2.5	2.5	3	3	3	3	3	3
Running test load	KN	7.5	15	22.5	30	45	62.5	125	187.5	250
Effort required to lift rated load	N	262	324	332	324	332	504	504	504	504X2
Strands of load chain		1	1	1	1	2	2	4	6	8
Diameter of load chain	mm	5	6	7.1	8	7.1	10	10	10	10
Dimensions (mm)	A	115	131	142	131	142	171	171	204	215
	B	127	156	186	156	180	230	410	410	645
	C	270	334	399	435	520	660	700	950	1075
	D	36	40	45	50	58	64	85	110	110
	K	30	28	36	33.5	40	50	64	71	85
Net weight	kg	7.2	9.5	13.5	17.5	21	38	70	125	160
Packing measurement	cm	22x15x19.5	23x18x19.5	28x21x24	28x21x24	32x21x26	40x21x31	50x41x21	64x38x64	64x38x64
Extra weight per metre of extra lift	kg	1.5	1.8	2.16	2.4	3.4	5.4	9.8	14.7	19.6

POWERED BY **ARMSTRONG INDUSTRIES LIMITED (USA)**



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Can fall if damaged, misused or overload. Inspect before use. Use only if trained. Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance



TROSX FLOW CONTROL SDN BHD
 (Co. No. 1237109-A)
 No. 39, Jalan Industri Mas 2, Taman Mas,
 47130 Puchong, Selangor Darul Ehsan, Malaysia.
 Tel: 6016-322 0390 Fax: 603-8068 3990
 Email: sales@trosex.com
 (GST No: 000397651968)