



TROSX FLOW CONTROL SDN BHD

(Co. No. 1237109-A)
 No. 39, Jalan Industri Mas 2, Taman Mas,
 47130 Puchong, Selangor Darul Ehsan, Malaysia.
 Tel: 6016-322 0390 Fax: 603-8068 3990
 Email: sales@trosxfc.com
 (GST No: 000397651968)

DUPLEX WEBBING SLING

One stop lifting solution




POWERED BY
 ARMSTRONG INDUSTRIES LIMITED (USA)



ARMSTRONG webbing slings are manufactured in Malaysia accordance with Machine Directive 98/79/EG from 100% polyester fibre and color-coding to EN1492-1.

For easy recognition and traceability, all our webbing slings are color coded, identified with WLL and labeled.

Working temperature range of -40oC to 100oC.

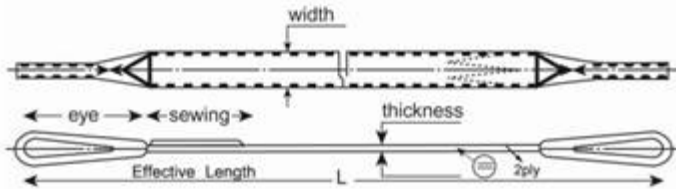

LIFTING INSTRUCTIONS

- CHECK THE LOAD WEIGHT
- PAY ATTENTION TO THE LIFTING ANGLE
- β = LIFTING ANGLE
- USE CORNER PROTECTORS ON SHARP EDGES
- DO NOT USE BROKEN SLINGS


MAX
100°C

WEBBING SLINGS • WEBBING SLING WITH EYES • ENDLESS WEBBING SLING



Lifting method	Direct lift	Tightening lift	Open lift	Angle lift	Angle lift	Angle lift	Angle lift
Form factor	WLL M = 1,0	WLL M = 0,8	WLL M = 2,0	WLL B = 0°-45° M = 1,4	WLL B = 45°-60° M = 1,0	WLL B = 0°-45° M = 0,7	WLL B = 45°-60° M = 0,5
SNV = WEBBING SLINGS							
UNV = ENDLESS WEBBING SLINGS							
Diameter/colour	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg
25 mm white	500	400	1000	700	500	350	250
50 mm violet	1000	800	2000	1400	1000	700	500
60 mm green	2000	1600	4000	2800	2000	1400	1000
90 mm yellow	3000	2400	6000	4200	3000	2100	1500
120 mm grey	4000	3200	8000	5600	4000	2800	2000
150 mm red	5000	4000	10000	7000	5000	3500	2500
180 mm brown	6000	4800	12000	8400	6000	4200	3000
240 mm blue	8000	6400	16000	11200	8000	5600	4000
300 mm orange	10000	8000	20000	14000	10000	7000	5000
300 mm orange	12000	9600	24000	16800	12000	8400	6000

POWERED BY



For OSHA, ASME B30.9 and Manufacturer's Guidelines. Con for **ARMSTRONG INDUSTRIES LIMITED (USA)**
 Do not exceed rated capacity. Protect from contact with edges. DEATH or INJURY can occur from improper use or maintenance